

# AccessMaster<sup>®</sup>


## PUSH-AROUND PERSONNEL LIFTS



**15AM, 19AM,  
20AM, 25AM,  
30AM, 36AM,  
41AM**

**[www.jlg.com](http://www.jlg.com)**

# JLG<sup>®</sup>

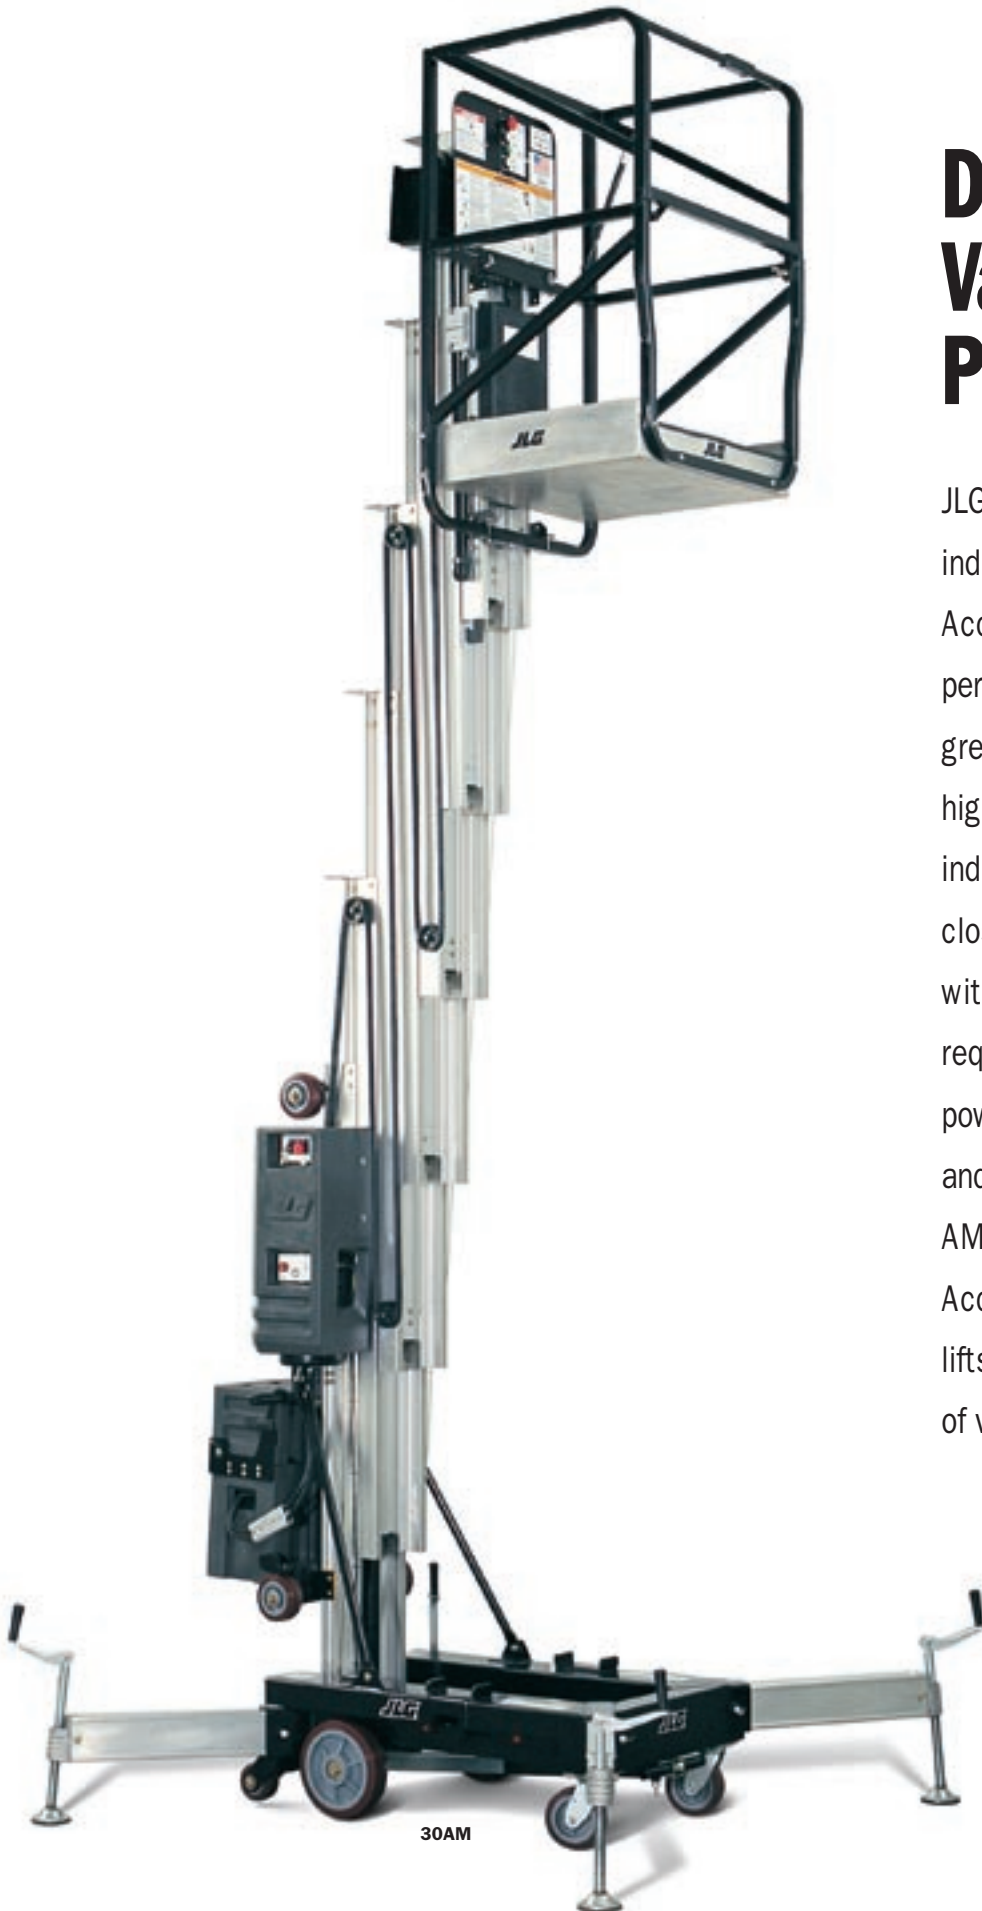

# Designed For Value and Performance

JLG takes the personnel lift industry to new heights with AccessMaster push-around personnel lifts. You'll enjoy greater productivity with the highest capacities in the industry and the ability to get closer to your work area. Plus, with a mast guide system that requires no lubrication, a unique power management system and the convenience of the AMI Series outriggerless lifts – AccessMaster push-around lifts provide a whole new level of value and performance.



### A Broad Family Offering for Improved Productivity

JLG AccessMaster personnel lifts are available in seven different models, with platform heights ranging from 15 to 41 feet (4.60 to 12.40 m). AccessMaster lifts are ideal for a broad range of work site requirements – from industrial and maintenance applications, to entertainment and institutional usage.

### Improved Maneuverability and Transport

The JLG six-wheel design gives the AM Series lifts enhanced maneuverability, while the 10 in. (25 cm) wheels provide ease of movement. Models with heights up to 30 ft (9.14 m) roll through standard doorways and into elevators without tilt back, and have an overall length of 47 in. (1.19 cm) for transport in cargo vans or small elevators. All AM models have six-inch-wide (15 cm) fork pockets that allow for convenient loading, and can be loaded on standard size pickup trucks. Plus, new mid-ship tie down points are easier to reach and provide improved protection from chain damage.



### Quick-Change Platforms

JLG offers a family of quick-change platforms that can be changed in less than one minute without tools, to suit your specific application needs. Choose from our standard oversized gull-wing entry platform measuring 26 x 28 in. (66 x 71 cm) or an optional narrow gull-wing entry platform measuring 22 x 22 in. (56 x 56 cm). Also available for the AMI Series Models only is an optional gull-wing front entry extension platform measuring 26 x 26 in. retracted; 49 x 26 in. extended. All rail heights are 43-1/4 in. (1.09 m). Rail Height of 43-1/4 in. meets OSHA standards.



### Stronger Anodized Mast

Every AccessMaster lift features an anodized mast that is more rigid for less deflection and sway. The mast guide system requires no lubrication for the life of the machine.



### DC Model Power Management System

The AccessMaster DC Model lifts' battery mount provides ease of access to the battery and includes a constant display battery discharge indicator (BDI) of the charge status of the battery. The JLG automatic battery charger takes the guesswork out of the charging times, and protects from overcharging and possible battery damage. Plus, with our unique automatic power-off system, you'll be able to avoid unnecessary battery drain and achieve optimum battery life.



# FEATURES AND SPECIFICATIONS

## Standard Features

Low Maintenance Anodized Mast  
 110 Volt Double Receptacle on Platform  
 Auto Power Saver – Shuts Off Power when Idle  
 Battery Discharge Indicator (BDI) – DC Models only  
 Lanyard Attachment Anchor for Fall Protection Systems  
 Non-Marking Tires  
 Oversized Quick-Change 26 x 28 in. (66 x 71 cm) Gull-Wing Front Entry Platform  
 Automatic Battery Charger – DC Models only  
 Roller Loading Device for Loading on Standard Size Pickup Trucks – AM Models only  
 Tilt Back – on 36AM & 41AM only  
 JLG “1 & 5” Warranty

## Available Options

Narrow Quick-Change 22 x 22 in. (56 x 56 cm) Gull-Wing Front Entry Platform  
 Extension Quick-Change Platform (AMI Models only) 26 x 26 in. Retracted; 49 x 26 in. Extended, Gull-Wing Front Entry  
 18 x 8 in. Tool Tray – 5 in. Deep  
 Fluorescent Light Tube Caddy  
 Straddle Kit – AM Models only  
 Straddle Outrigger Interlock Adapter  
 Lifting Eye for a Crane Hook  
 Auxiliary Emergency Lowering Control  
 Extra Power Pack – DC Models only  
 Descent Alarm  
 Flashing Amber Beacon  
 High Performance 5-Hr. Charger with Maintenance Free AGM Batteries  
 Security Lock  
 Hourmeter  
 Clean Room Option – 15 AMI – AC Models only

	15AMI	19AMI	20AM	25AM	30AM	36AM	41AM
<b>Working Height</b>	21 ft (6.40 m)	25 ft (7.62 m)	26 ft (7.92 m)	31 ft (9.45 m)	36 ft (11.0 m)	42 ft (12.80 m)	47 ft (14.33 m)
<b>Platform Height</b>	15 ft (4.57 m)	19 ft 4 in. (5.89 m)	20 ft 5 in. (6.09 m)	25 ft 2 in. (7.62 m)	29 ft 10 in. (9.14 m)	36 ft 3 in. (11.05 m)	40 ft 9 in. (12.42 m)
<b>Platform Capacity</b>	350 lb (160 kg)	350 lb (160 kg)	350 lb (160 kg)	350 lb (160 kg)	350 lb (160 kg)	300 lb (135 kg)	300 lb (135 kg)
<b>Overall Height – Stowed</b>	77.5 in. (2.0 m)	78 in. (1.98 m)	77.5 in. (2.0 m)	77.5 in. (2.0 m)	77.5 in. (2.0 m)	104 in. (2.64 m)	104 in. (2.64 m)
<b>Overall Base Width – Stowed</b>	29 in. (74 cm)	34 in. (86 cm)	29 in. (74 cm)	29 in. (74 cm)	29 in. (74 cm)	29 in. (74 cm)	29 in. (74 cm)
<b>Overall Length – Stowed</b>	52.5 in. (1.33 m)	53.5 in. (1.35 m)	47 in. (1.19 m)	49 in. (1.24 m)	52 in. (1.32 m)	54.5 in. (1.38 m)	57.5 in. (1.46 m)
<b>Overall Base Length – Without Platform</b>	52.5 in. (1.33 m)	52.5 in. (1.33 m)	47 in. (1.19 m)	47 in. (1.19 m)	47 in. (1.19 m)	53 in. (1.35 m)	53 in. (1.35 m)
<b>Overall Height – Tilted Back</b>	n/a	n/a	n/a	n/a	n/a	76.5 in. (1.94 m)	79 in. (2.0 m)
<b>Overall Length – Tilted Back</b>	n/a	n/a	n/a	n/a	n/a	108 in. (2.74 m)	108 in. (2.74 m)
<b>Ground Entry Height</b>	19 in. (48 cm)	17.5 in. (44 cm)	19 in. (48 cm)	19 in. (48 cm)	19 in. (48 cm)	19 in. (48 cm)	19 in. (48 cm)
<b>Outrigger Footprint Length</b>	n/a	n/a	62 in. (1.57 m)	62 in. (1.57 m)	68 in. (1.73 m)	79 in. (2.01 m)	79 in. (2.01 m)
<b>Outrigger Footprint Length – CSA</b>	n/a	n/a	79 in. (2.01 m)	79 in. (2.01 m)	93 in. (2.36 m)	108 in. (2.74 m)	108 in. (2.74 m)
<b>Outrigger Footprint Width</b>	n/a	n/a	53 in. (1.35 m)	53 in. (1.35 m)	61 in. (1.55 m)	79 in. (2.01 m)	79 in. (2.01 m)
<b>Outrigger Footprint Width – CSA</b>	n/a	n/a	79 in. (2.01 m)	79 in. (2.01 m)	98 in. (2.36 m)	119 in. (3.02 m)	119 in. (3.02 m)
<b>Platform to Wall – Front</b>	0 in.	0 in.	8 in. (20 cm)	5 in. (13 cm)	5 in. (13 cm)	14 in. (35 cm)	11 in. (28 cm)
<b>Platform to Wall – Front – CSA</b>	n/a	0 in.	17 in. (43 cm)	14 in. (36 cm)	18 in. (46 cm)	28 in. (71 cm)	26 in. (66 cm)
<b>Platform to Wall – Side</b>	1.5 in. (4 cm)	4 in. (10 cm)	13 in. (33 cm)	13 in. (33 cm)	18 in. (46 cm)	26 in. (66 cm)	26 in. (66 cm)
<b>Platform to Wall – Side – CSA</b>	n/a	4 in. (10 cm)	26 in. (66 cm)	26 in. (66 cm)	37 in. (94 cm)	46 in. (117 cm)	46 in. (117 cm)
<b>Gross Vehicle Weight – AC</b>	820 lb (373 kg)	n/a	740 lb (336 kg)	825 lb (374 kg)	890 lb (404 kg)	1,060 lb (481 kg*)	1,100 lb (499 kg†)
<b>Gross Vehicle Weight – DC</b>	910 lb (414 kg)	1,130 lb (513 kg)	860 lb (390 kg)	905 lb (410 kg)	940 lb (426 kg)	1,160 lb (526 kg**)	1,230 lb (558 kg††)

\*for CSA add 170 lb (77 kg); \*\*for CSA add 125 lb (57 kg); †for CSA add 215 lb (98 kg); †† for CSA add 145 lb (66 kg)

## The JLG “1 & 5” Warranty

JLG Industries, Inc. backs our products with our exclusive “1 & 5” Warranty. We provide coverage on all products for one (1) full year, and cover all specified major structural components for five (5) years. Due to continuous product improvements, we reserve the right to make specification and/or equipment changes without prior notification. This machine meets or exceeds applicable OSHA Regulations in 29 CFR 1910.67, 29 CFR 1926.453, ANSI A92.3-1990, as originally manufactured for intended applications.

## JLG Industries, Inc.

1 JLG Drive, McConnellsburg, PA 17233-9533  
 Telephone 717-485-5161 Toll-free in US 877-JLG-LIFT  
 Fax 717-485-6417  
[www.jlg.com](http://www.jlg.com)

Printed in USA  
 FORM NO.: SS-AM-698-20M  
 PART NO.: 3132106  
 R060505

